





## CTEB-LIFT 230

Due to its simplicity and versatility, **CTE B-LIFT 230** is the ideal equipment for maximum performance in different types of application: construction, maintenance, arboriculture and building maintenance.

The use of SSAB Strenx steel guarantees stability and rigidity during operations, allowing the user to work in perfect safety and ergonomics.

## VARIABLE OUTREACH

Outreach varies according to selected load in basket and stabiliser position.

## CAB ANTICOLLISION SYSTEM

**CTE B-LIFT 230** features a safety system for preventing collision between the superstructure and vehicle cab.





# STABILITY AT HEIGHT



The boom ensures full operator stability in the basket.



# CLEAN TOP BOOM

In **CTE B-LIFT 230** truck-mounted aerial platforms both the extension cylinder and the electrical and hydraulic systems are inside the arm, protected from weathering and debris.

The electrical system and catenary housed inside the arm are protected from getting caught up with other elements during operation.

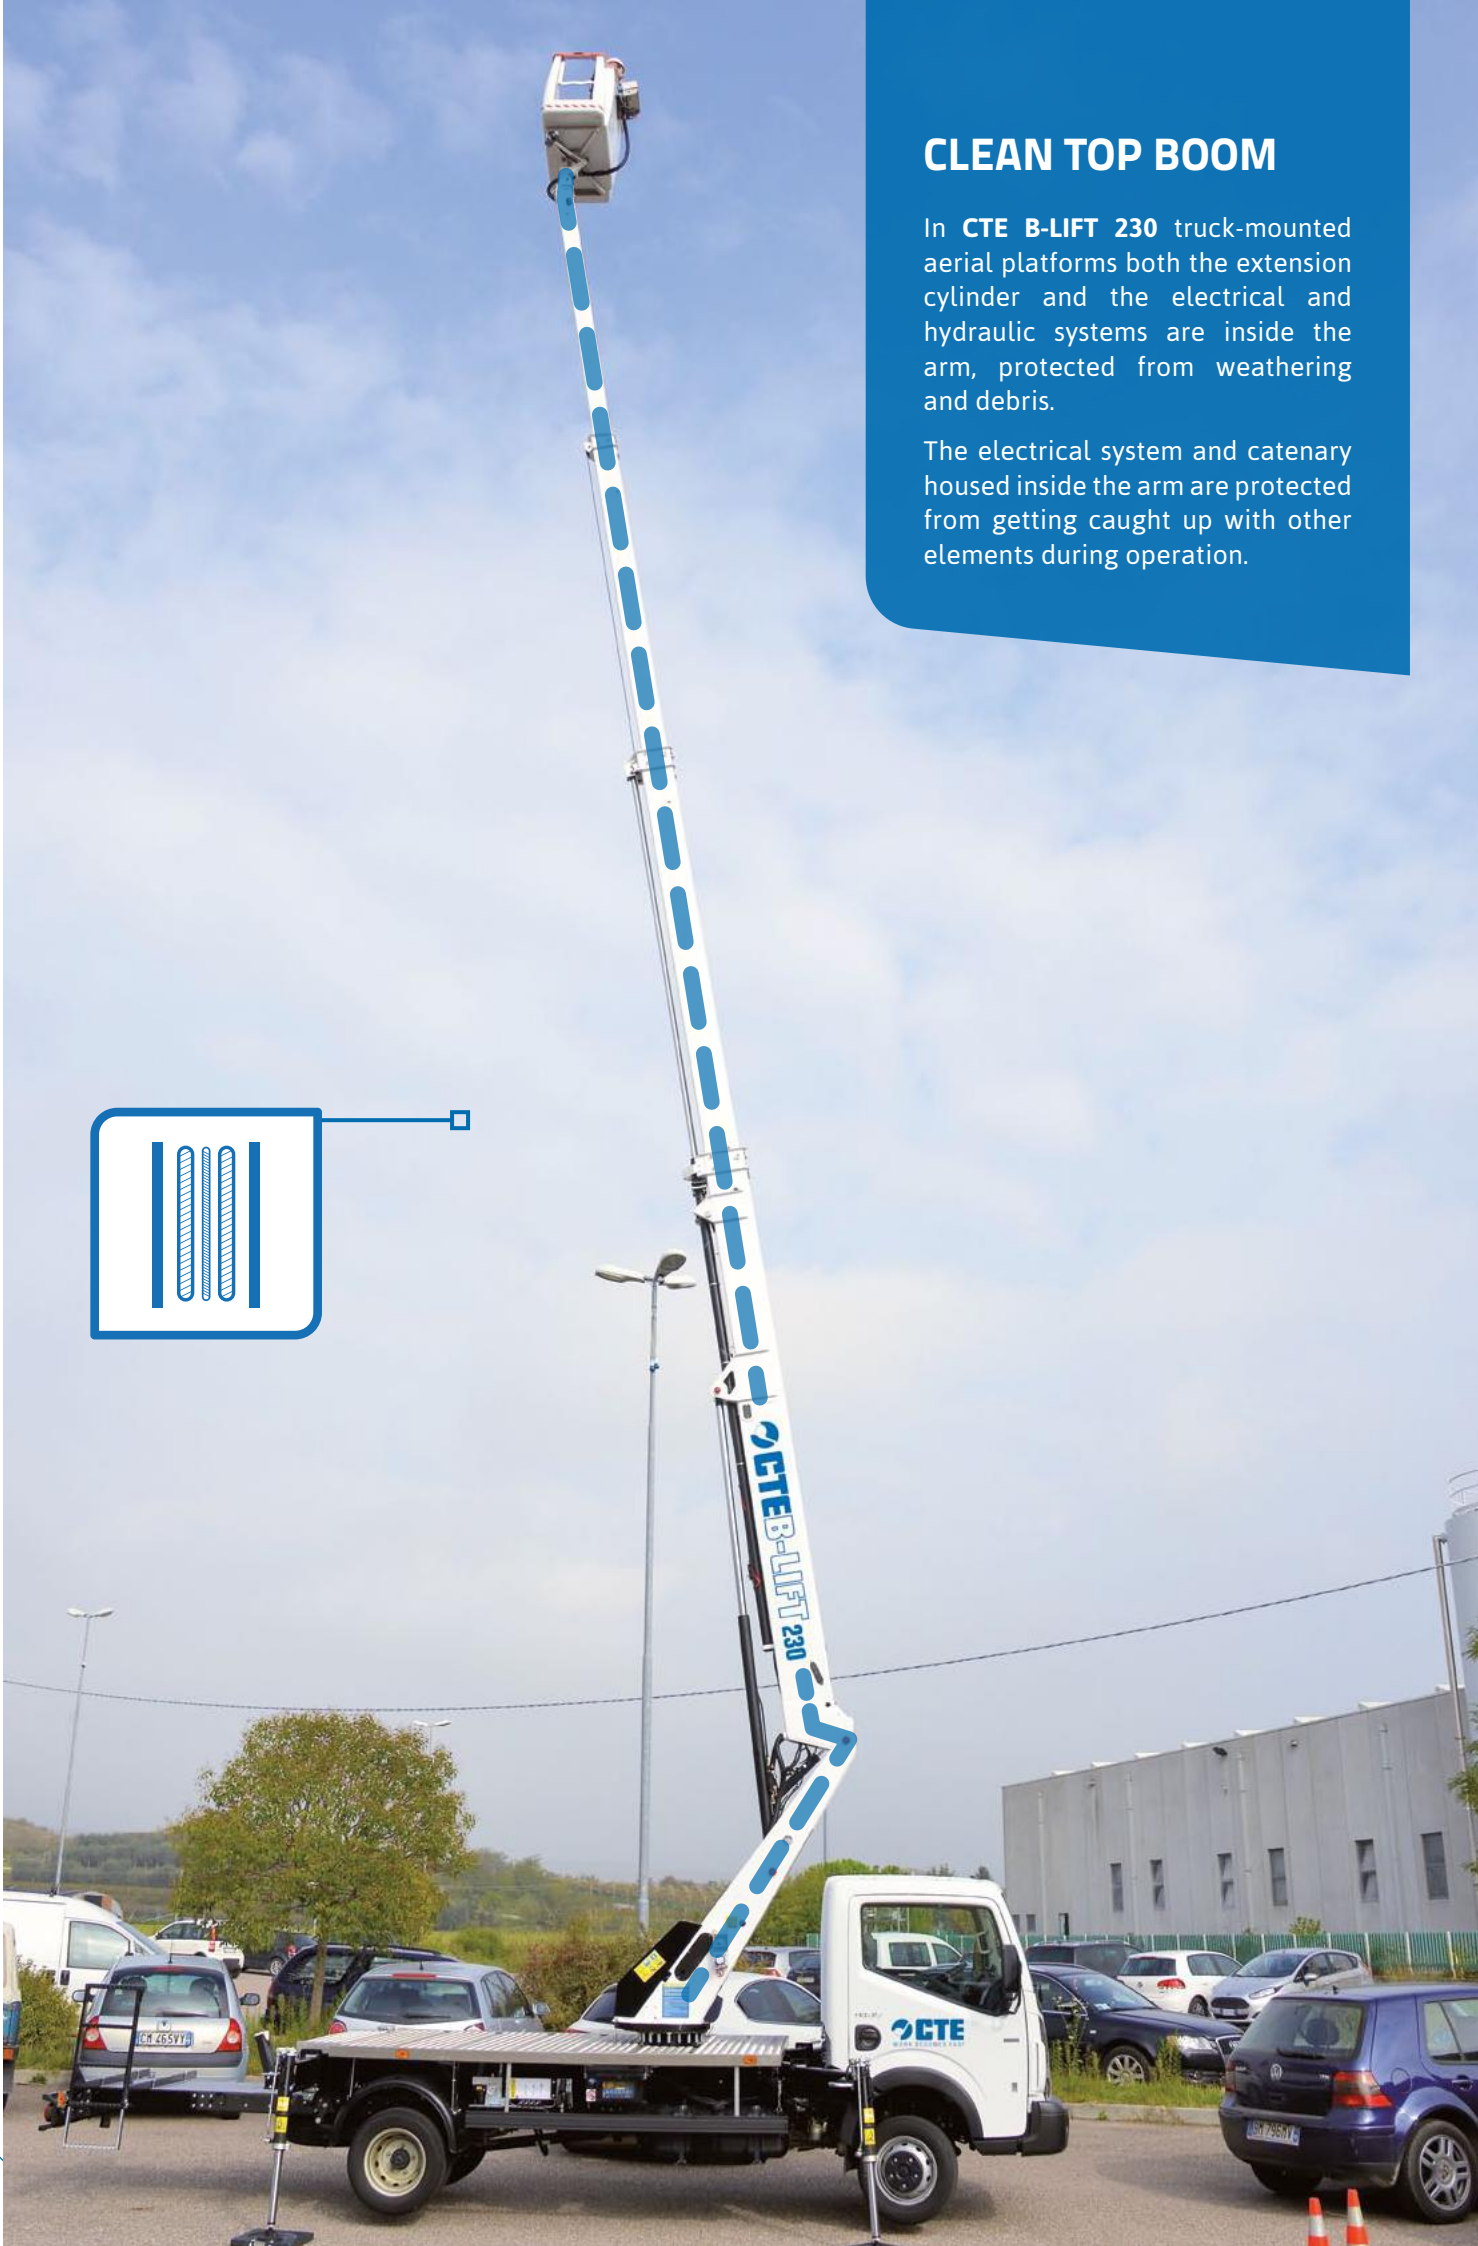



## CONTROL VERSATILITY

Double control panel with the same functions in basket and on the ground with proportional controls.



## CONTROL PROTECTION

The command station is protected by a cover that protects it from accidental damage by falling debris or bad weather.

## TECHNICAL DATA

- Telescopic boom (4 elements: main boom + 3 telescopic extensions)
- 540° non continuous turret rotation on bearing turntable
- Proportional electrohydraulic controls with simultaneous manoeuvres (ergonomic joysticks)
- Engine start/stop control from basket
- Anti slip aluminium deck
- Aluminium basket
- System to automatically limit the outreach depending on the weight in the basket
- 60° Right + 60° Left electric rotating basket
- Automatic basket levelling by hydraulic parallelogram
- N° 4 hydraulic outriggers with ground pressure sensors
- 230 V AC CE Electric socket in the basket
- Buzzer when PTO is coupled with disconnected hand brake
- Hour meter
- N° 1 flashing beacon
- Ground control station with display
- EN 280:2013 CE certified
- Standard boom colour blue (RAL 5017) or white (RAL 9003)

## MODELS AVAILABLE

 **CTEB-LIFT 230 PRO A**

 **CTEB-LIFT 230 PRO H**